

# INDICATOR 2100


Weight indicator with basic scale functions

## BENEFITS

- Developed for mobile use
- Compact, robust and shock proof
- Bluetooth data transfer
- Integrated voltage converter
- Dust and watertight



Top quality  
Connects to WMS

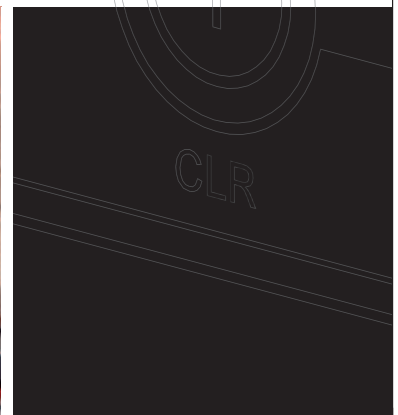

# RAVAS

# INDICATOR 2100


## FUNCTIONS

- Automatic and manual zero correction
- Gross/net weighing
- Automatic tare by push button
- Tare entry by cursor function
- Totalling with sequence number
- Error messages in display
- Power supply to printer switched on and off by indicator
- Automatic shut-off function, defined by parameter setting
- Low battery indication



## STANDARD SPECIFICATIONS

- |                     |  |
|---------------------|--|
| ▪ Display           | digital  |
| ▪ Segments          | LCD, digit height 18 mm  |
| ▪ Graduation        | 0.1, 0.2, 0.5, 1, 2, 5, 10, 20 or 50 kg (see specifications weighing system) |
| ▪ Housing           | plastic (ABS)  |
| ▪ Bracket           | steel  |
| ▪ Colour            | red (RAL 3000)   |
| ▪ Protection class  | IP65   |
| ▪ Power supply      | 12V (230V for stationary applications)                                       |
| ▪ Power consumption | 18 mA  |
| ▪ Dimensions        | excl. bracket: 60 x 77 x 182 mm  |

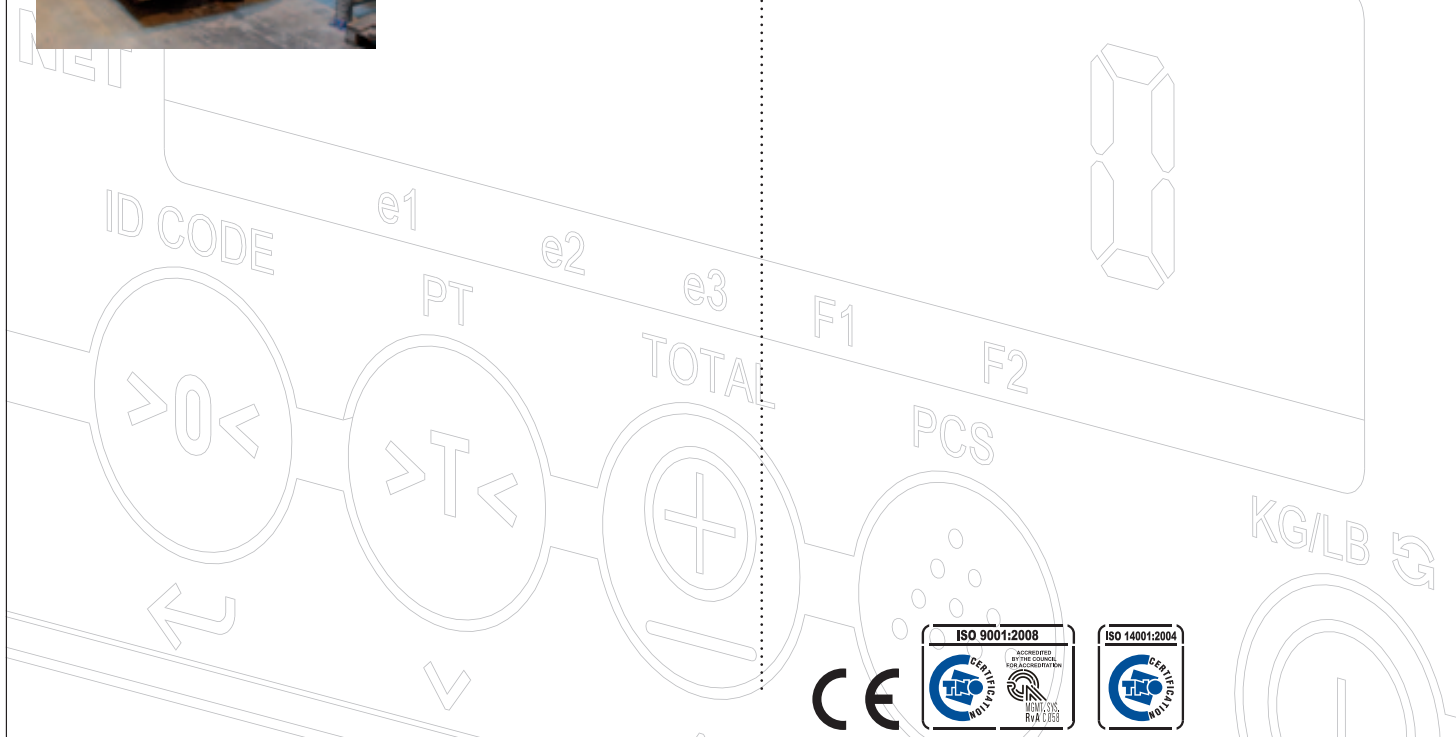

## PREMIUM OPTIONS\*

- Printer output to thermal or matrix printer
- Bluetooth or WLAN output

## OPTIONS\*

- RS232 output for cable connection to truck terminal
- Multirange graduation (see specifications weighing system)
- Explosion proof version (EXi)

\* The use of options may change related specifications.

## RAVAS UK Ltd

Office 130, 5 High Street  
Maidenhead, Berkshire, GB-SL6 1JN, United Kingdom  
T. +44 (0)1628 67 35 24, F. +44 (0)1628 67 08 78  
info.uk@ravas.com, www.ravas.co.uk

# RAVAS