

INDICATOR 4100

Weight indicator with extended scale functions

BENEFITS

- Piece counting, code entry, kg/lb toggle
- Relay for automatic dosing
- Three communication protocols
- Display with backlight

>0<
NET



Top quality

Advanced functions



RAVAS


INDICATOR 4100

FUNCTIONS

- Automatic and manual zero correction
- Gross/net weighing
- Automatic tare by push button
- Tare entry by cursor function
- Totalling with sequence number
- Piece counting by sampling or entering of piece weight
- Code entry for max. 5-digit codes, by cursor function
- Three data output modes: print, continuous and command/answer
- kg or lb readout
- Internal clock (for recording date/time on printout)
- Error messages in display
- Power supply to printer switched on and off by indicator
- Automatic shut-off function, defined by parameter setting
- Low battery indication

STANDARD SPECIFICATIONS

- | | |
|---------------------|--|
| ▪ Display | digital |
| ▪ Segments | LCD, digit height 18 mm, backlight |
| ▪ Graduation | 0.1, 0.2, 0.5, 1, 2, 5, 10, 20 or 50 kg (see specifications weighing system) |
| ▪ Housing | plastic (ABS) |
| ▪ Bracket | steel |
| ▪ Colour | red (RAL 3000) |
| ▪ Protection class | IP65 |
| ▪ Power supply | 12V (230V for stationary applications) |
| ▪ Power consumption | 26 mA (18 mA without backlight) |
| ▪ Dimensions | excl. bracket: 60 x 77 x 182 mm |

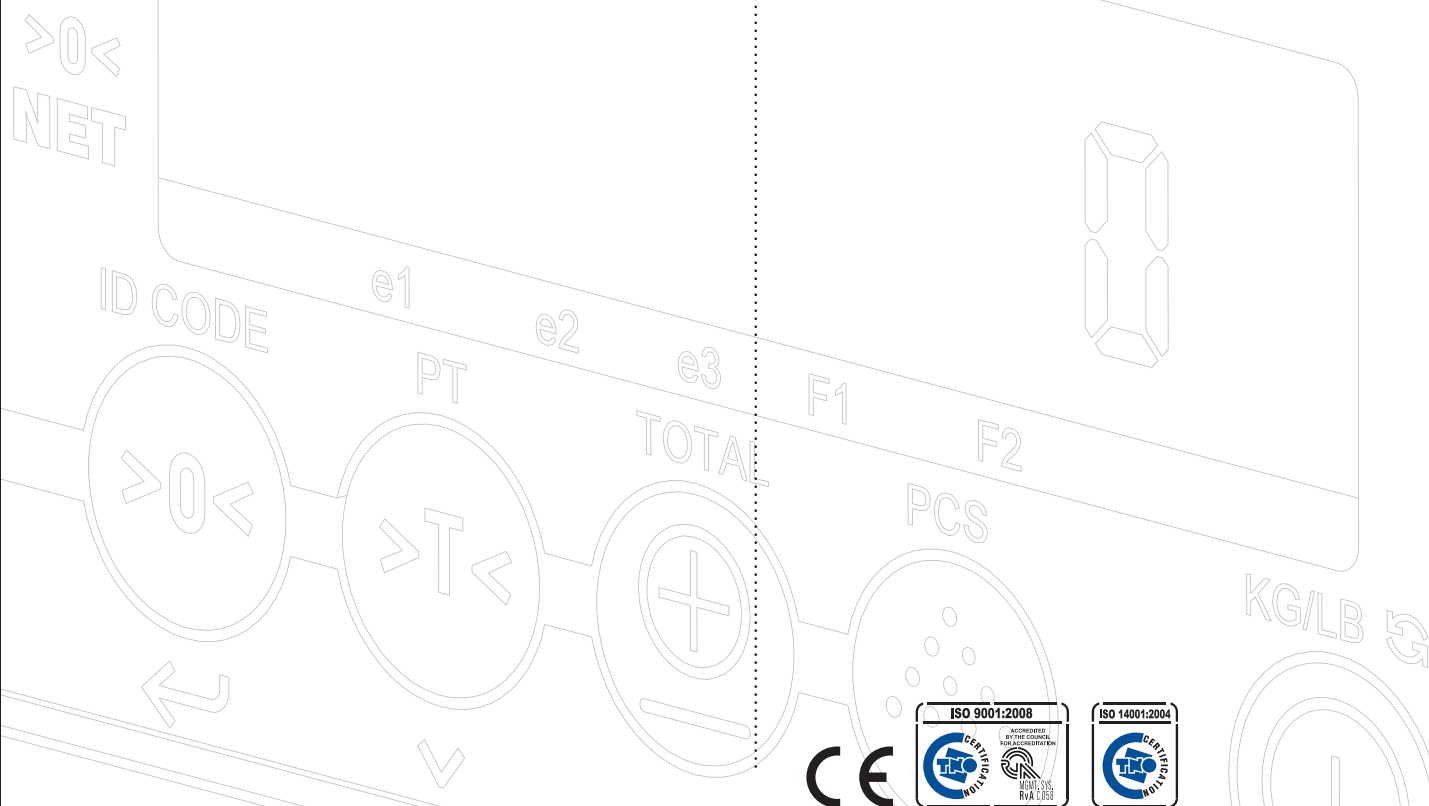

PREMIUM OPTIONS*

- Printer output to thermal or matrix printer
- Bluetooth or WLAN output
- Relay setpoint switch, for automatic dosing

OPTIONS*

- RS232 output for cable connection to truck terminal
- Multirange graduation (see specifications weighing system)
- Explosion proof version (Exd)

* The use of options may change related specifications

RAVAS Europe B.V.

P.O. Box 2023, NL-5300 CA Zaltbommel, The Netherlands
T. +31 (0)418 51 52 20, F. +31 (0)418 51 53 20
backoffice@ravas.com, www.ravas.com

RAVAS